


HO SD40M-2 Locomotive

Announced: 02.27.15 Orders Due: 03.27.15

ETA: November 2015

Southern Pacific*

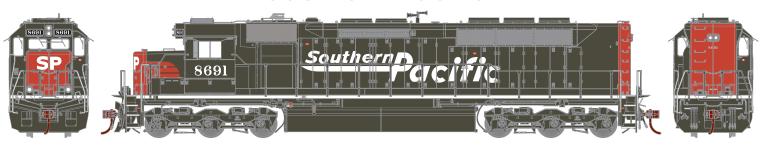

Without Sound

ATHG63576 #8691 ATHG63577 #8693 ATHG63578 #8694 ATHG63579 #8695

With Sound


ATHG63676 #8691 ATHG63677 #8693 ATHG63678 #8694 ATHG63679 #8695

ROAD NAME FEATURES

- Ex EL and Conrail MK rebuilds with modified engine doors
- Illuminated Ditchlights
- Cab mounted A/C
- Frame mount bell Large SP Plow

- Sinclair antenna on antenna plane
 Nathan P-3 on bracket located on long hood
 Flexicoil-C Trucks with high brake cylinders and exposed roller bearings
- Era: 1991+

Union Pacific*

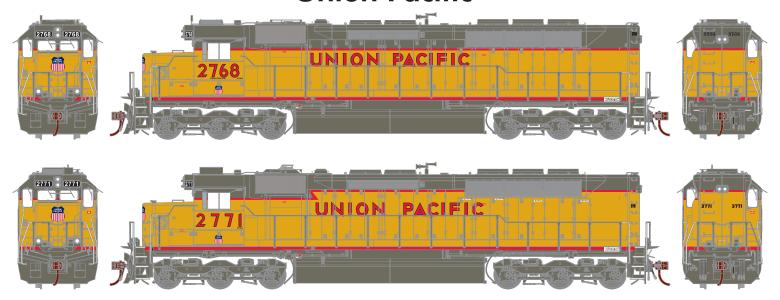

Without Sound

ATHG63580 #2768 ATHG63581 #2771

With Sound

ATHG63680 #2768 ATHG63681 #2771

ROAD NAME FEATURES

- SP repaints
- Illuminated Ditchlights
- Cab mounted A/C
- Frame mount bell
- Large Plow
- Sinclair antenna on antenna plane
- Nathan P-3 on bracket located on long hood
- GPS Dome
- Flexicoil-C Trucks with high brake cylinders and exposed roller bearings
- · Era: 1996+

* Union Pacific Licensed Product

w/o Sound \$189.98 With [sunami Sound \$289.98





HO SD40M-2 Locomotive

Announced: 02.27.15 Orders Due: 03.27.15

ETA: November 2015

MODEL FEATURES

- · Safety tread on walkways
- Fine-scale handrails for scale appearance
- Factory applied wire grab irons
- Windshield wipers
- · See through cab windows
- Detailed and painted cab interior
- Sliding side cab windows
- Metal lift rings
- Fully-assembled and ready-to-run
- Accurately painted and printed paint schemes
- Incandescent bulbs for realistic appearance
 DCC-ready features Quick Plug™ plug-and-play technology with both 8- and 9-pin connector
 Scaled from prototype resources including drawings, photographs, and more
- Body mounted McHenry operating scale knuckle couplers
- Genesis driveline with 5-pole skew wound motor, precision machined flywheels, and multi-link drivetrain for trouble free operation All-wheel drive with precision gears for smooth and quiet operation
- · All-wheel electrical pickup provides reliable current flow
- · Wheels with RP25 contours operate on Code 55, 70, 75, 80, 83, and 100 rail
- · Bi-directional constant lighting so headlight brightness remains constant
- · Heavy die-cast frame for greater traction and more pulling power
- Packaging securely holds for the model for safe storage
- Minimum radius: 18"
- Recommended radius: 22"

SOUND EQUIPPED MODELS ALSO FEATURE

- · Onboard DCC decoder with SoundTraxx Tsunami decoder
- · Sound units operate in both DC and DCC
- · Some functions are limited in DC
- Engine, horn, and bell sounds work in DC
- All functions NMRA compatible in DCC mode
- Slow speed control
- Program a multiple unit (MU) lashup with lead unit only horn, bell, and lights
- Many functions can be altered via Configuration Value (CV) changes
- · CV chart included in the box
- · For a complete list of features, visit athearn.com